



STANDARD DRIVEWAY

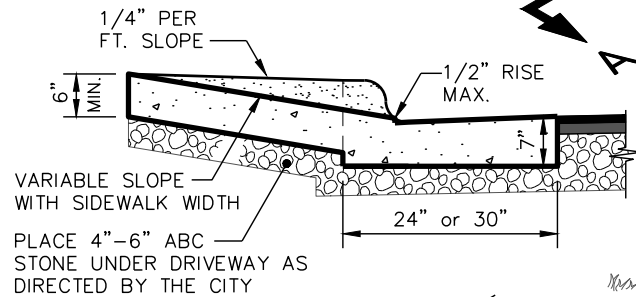

SECTION A-A

ALTERNATE DRIVEWAY

"A" - MINIMUM DRIVEWAY TURNOUT
 "B" - POUR AS 1 PIECE IF PLACING TO PROPERTY LINE

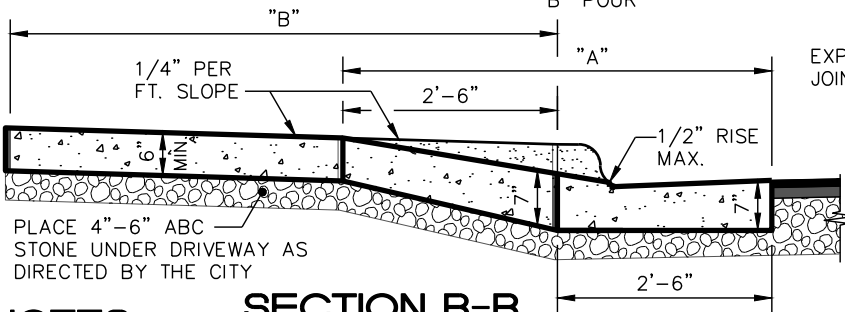

SECTION B-B

NOTES:

1. Curb and gutter section will be poured continuous through the standard and alternate driveway with the face of curb dropped down as shown.
2. Driveway will be constructed after the curb forms have been removed.
3. Driveway within R/W shall be concrete.
4. Concrete shall be non-reinforced, air-entrained with a minimum strength of 3000 lbs.



Dept. of Public Works
 101 City Hall Plaza
 Durham, NC 27701

CITY OF DURHAM, NC
 USE WITH THE STANDARD SPECIFICATIONS ONLY

Voice (919) 560-4326

www.durhamnc.gov

DRIVEWAY FOR CURB & GUTTER STREET SECTION (RESIDENTIAL)

SCALE: Not to Scale	DETAIL# 404.01
REVISION DATE: 06/2020	SHEET# 1 of 1