


**VERTICAL LIP**

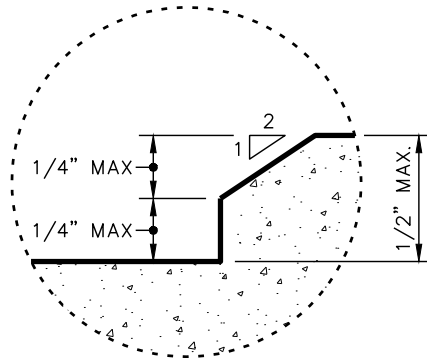

**VERTICAL LIP WITH BEVEL**

**NOTES:**

1. The transition between the truncated dome tray and the curb should be made to be flush. The transition between the curb and the gutter should be smooth or rounded. If neither a flush or smooth transition can be constructed, and the transitions change in level, up to 1/4", then the lip may be vertical and without edge treatment. If the transitions change in level, between 1/4" and 1/2", then the lip shall be beveled with a slope no greater than 1:2.
2. This detail is for transition points only, refer to curb cut details for proper curb layout / design. (City Std. Details 405.01 thru 405.07)

Details Provided by APPIAN Consulting Engineers - www.appianengineers.com



Dept. of Public Works  
101 City Hall Plaza  
Durham, NC 27701

**CITY OF DURHAM, NC**  
USE WITH THE STANDARD SPECIFICATIONS ONLY

Voice (919) 560-4326

www.durhamnc.gov

**CURB CUT RAMP  
TRANSITION POINTS**

SCALE:  
Not to Scale

DETAIL#  
405.08

REVISION DATE:  
06/2017

SHEET#  
1 of 1