
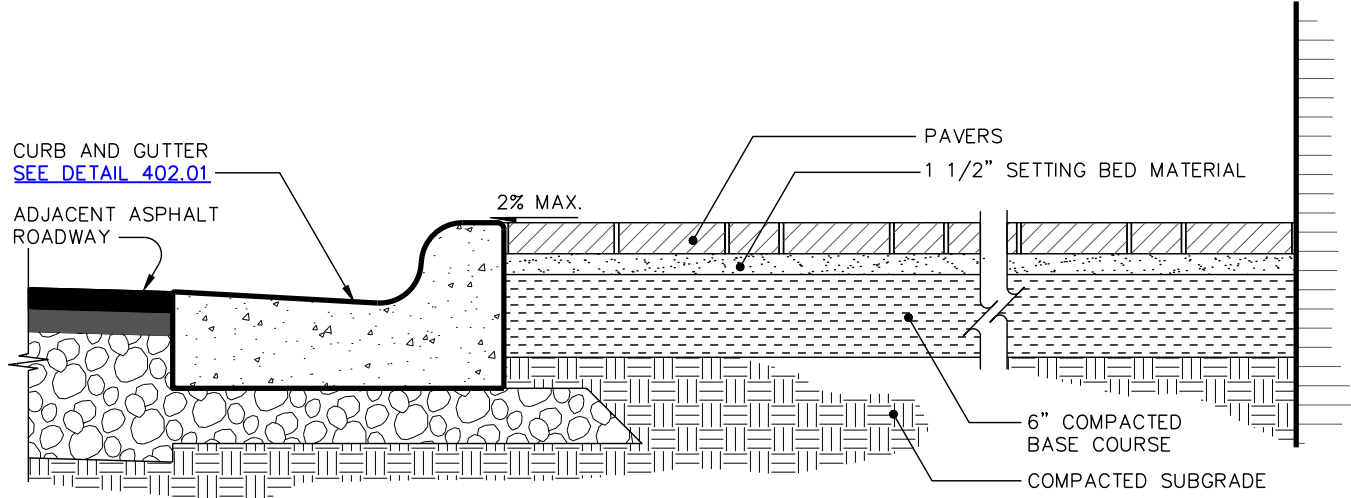


Details Provided by APPIAN Consulting Engineers - www.applanengineers.com

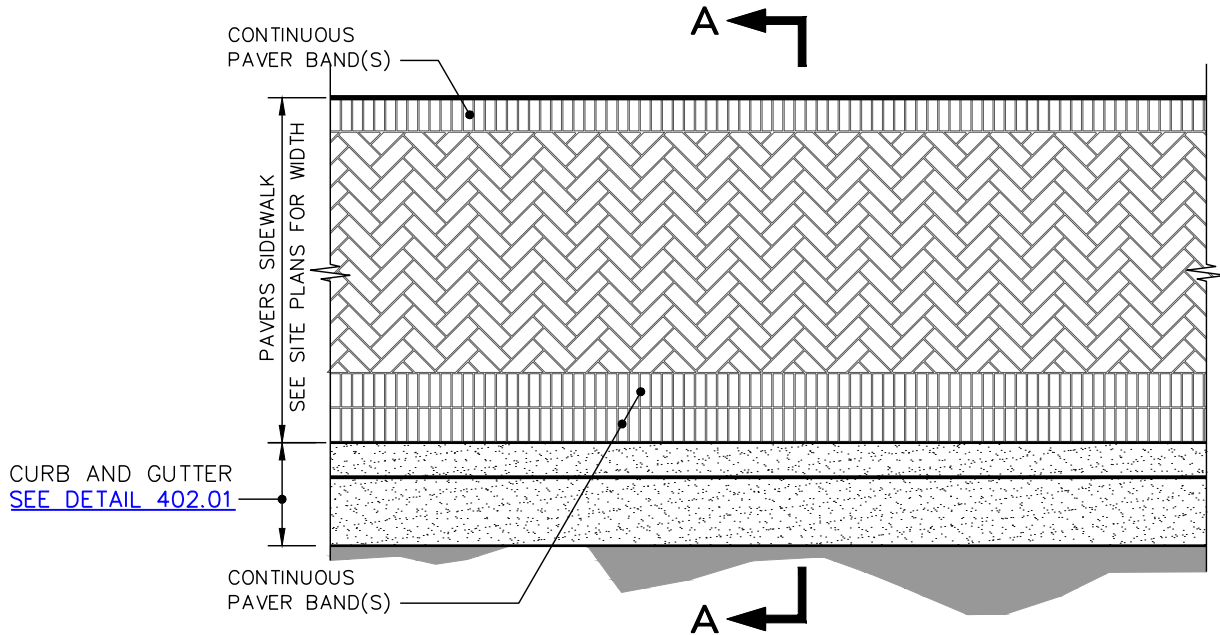

SECTION A-A

NOTES:

1. Pedestrian/Light Traffic brick shall conform to ASTM C902-95. Minimum compressive strength 8,000 psi. Maximum cold water absorption 8%. Maximum abrasion index 0.11. Brick dimensions and pattern to match existing brick pavers at the site.
2. Bedding sand should be washed free from deleterious or foreign materials, well graded, angular, concrete sand conforming to ASTM C33. Spaces between brick pavers shall be filled with washed mason sand per ASTM C144.
3. Compacted base course should be well graded conforming to ASTM D2940.



Dept. of Public Works
101 City Hall Plaza
Durham, NC 27701

CITY OF DURHAM, NC
USE WITH THE STANDARD SPECIFICATIONS ONLY

Voice (919) 560-4326
www.durhamnc.gov

**STANDARD PAVER WALKWAY WITH
CONTINUOUS PAVER BAND AT CURB
DOWNTOWN STREETScape DETAILS**

SCALE: Not to Scale	DETAIL# 406.06
REVISION DATE: 06/2017	SHEET# 1 of 1